



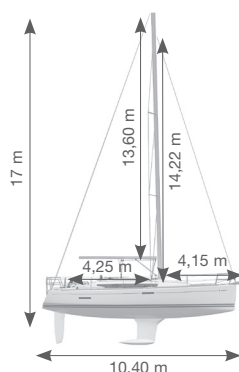

Sun Odyssey 389

SPECIFICATIONS

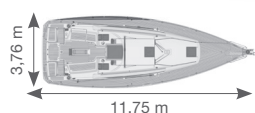

Overall length	11,34 m / 37'2"
Overall Length with Bowsprit	11,75 m / 38'6"
Hull length	10,98 m / 36'
Waterline length	10,40 m / 34'1"
Beam	3,76 m / 12'4"
Displacement light load with deep draft keel	6920 kg / 15256 lbs
Standard keel draft	1,98 m / 6'5"
Standard keel weight	1996 kg / 4400 lbs
Shoal keel draft	1,50 m / 4'11"
Shoal keel weight	2228 kg / 4912 lbs
Lifting keel draft with twin rudders	1,10 m-2,25 m / 3'7" - 7'4"

Lifting keel weight	2313 kg / 5099 lbs
CE category	A8 / B8* / B9
Fuel capacity	130 L / 34 US gal
Water capacity	200 L / 53 US gal
Fridge capacity	185 L / 49 US gal
Holding tank capacity	80 L / 21 US gal
Architect/Designer	Marc Lombard / Jeanneau Design
Standard mainsail horizontally-cut in high-quality dacron	35,00 m² / 377 Sq ft
Standard headsail 132% horizontally-cut in high-quality dacron	35,00 m² / 377 Sq ft

* B8 when the lifting keel version is equipped

AN EXCEPTIONAL LEVEL OF EQUIPMENT

EXTERIOR

Sailing features

- High aspect ratio rig
- Harken genoa tracks
- Harken winches
- Harken deck hardware
- Aluminium classic mast and boom
- Semi full-batten main and furling genoa with UV protection
- Standing rigging discontinuous stainless steel wire
- Lazy bag and lazy jacks
- Sheets lead back to the helm – German sheeting
- Wide selection of optional sails

Construction

- Hull solid, hand-laid fibreglass, ISO gelcoat surface, protective barrier coat
- Deck Prisma Process® injected deck, ISO gelcoat surface, discontinuous balsa block coring – 30% weight savings as compared to traditional decks

Cockpit

- One-level cockpit with dedicated sail handling areas
- Multi-function cockpit table
- Leather-covered steering wheels
- Handholds on the cockpit table and at each helm station

Deck

- Flush deck hatches
- Long acrylic deck windows with GRP eyebrow
- Inboard shrouds for easier access forward

INTERIOR

- One-level interior with no door sills
- Leather-wrapped handrails
- Direct and indirect LED lighting
- Large, double berths
- Fully-upholstered hull sides and ceiling
- Large storage spaces, seaworthy with fiddles

Galley

- Double stainless steel sinks
- 2-burner stove with oven
- Fridge 185 L / 49 US Gal with top access to better maintain the cold air

Woodwork

- Woodwork in Alpi teak
- UV stabilised varnish
- Light oak laminate floorboards
- Numerous solid wood mouldings

TECHNICAL

Electrical

- LED Navigation Lights
- 12V electrical panel
- Battery Exide Dual Marine
- 125A alternator and charge distributor/isolator
- Positive and negative battery cut-off switches to better protect battery banks

Water systems

- Hot water heater 25L/ 7US gal
- "Heavy-duty" water pump

Engine

- Fixed 3-blade propeller
- Sound insulation 40 mm / 1 1/2" thick

TRIM LEVELS AND PACKAGES

TRIM LEVEL	PREMIERE	PREFERENCE
Mid ship cleats	✓	✓
Luxury 2-burner stove with oven and grill in stainless steel	✓	✓
40A multi-phase battery charger	✓	✓
220V shorepower with plugs at chart table, in the galley and cabins	✓	✓
Shades for hatches and ports and screens for hatches	✓	✓
GRP bowsprit with integrated anchor roller	✓	✓
2 Additional 80Ah house batteries	✓	✓
Plexiglass shower door in head	✓	✓
Hot and cold cockpit shower		✓
Vertical access door to fridge compartment		✓
Fusion R70N with bluetooth		✓
Cockpit table with central storage compartment, handrail, cup holders, lighting and 12V plug		✓
Speakers in the saloon		✓
Speakers in the cockpit		✓
Lifeline gates		✓

NAVIGATION PACK

- Harken 35.2 self tailing winch on starboard coachroof with additional winch handle
- Spinnaker deck fittings with Spinlock jammers
- Rigid boom vang
- Ball-bearing genoa lead cars, adjustable from the cockpit
- Halyard bags in the cockpit
- Windex 15"

PERFORMANCE PACK

- Flex-o-fold 3-blade, folding propeller
- Harken mainsheet traveler with ball-bearing car
- Dyneema® low-stretch halyards for main and genoa
- Dyform discontinuous standing rigging

EQUIPMENT

ARCHITECTURE

- Hull chine for improved stability and speed
- Long waterline for better speed while sailing and under power
- L-shaped cast iron keel less exposed to seaweed and lines
- High ballast-to-weight ratio
- Balanced rudders with stainless steel shafts

SAILS

Standard

- Horizontally-cut in high-quality Dacron
- Semi full-batten mainsail with 2 auto reefs 35 m²/377 Sq ft
- Furling Genoa 132% with UV protection 35m² / 377 Sq ft
- Lazy bag with offset zipper in Sunbrella® Taupe with integrated lazy jacks

Options

- Performance genoa 132% with UV protection in triradial cut mylar/taffeta 35.00 m² / 377 Sq ft
- Self-tacking jib with UV protection in triradial cut mylar/taffeta laminate 23.3 m² / 251 Sq ft
- Performance mainsail in triradial cut mylar/taffeta 35 m²/377 Sq ft
- In mast furling horizontally-cut in high-quality dacron 27.2m²/293 Sq ft
- Code 0 in triradial cut mylar/aramid laminate 55.2m²/594 Sq ft, with continuous line furler

SAIL HANDLING

Standard

- Harken genoa tracks with adjustable lead cars (located on the side decks)
- Spinlock jammers
- Mainsheet and genoa sheet lead back to helm station with Spinlock jammers
- Coachroof winch 1 x Harken 35.2ST
- Genoa winches 2 x Harken 40.2 self-tailing winches for easy use at the helm stations
- Winch handle 1 x Harken handle with ball-bearing grip

Options

- Self tacking jib ball bearing track on coachroof
- Asymmetrical spinnaker gear : halyard, 2 sheets, tack line lead forward on deck, blocks
- Electric coachroof winch 1 x Harken 40.2 12v self-tailing in place of standard winch to port

MAST AND RIGGING

Standard

- Classic mast aluminium with double spreaders, deck-stepped
- Backstay double
- Genoa furler with double slot, furling line lead aft to port helm winch
- Running rigging topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets in polyester
- Standing rigging discontinuous 1x19 stainless steel wire

Options

- Furling mast aluminium with double spreaders, deck-stepped
- Backstay adjustable via mechanical adjuster

COCKPIT

Standard

- Cockpit lockers 1 locker under bench seat and 1 lazarette locker
- Teak inlay on cockpit bench seating
- Liferaft locker located in dedicated compartment 90x59x34 cm / 2'11"x1'11"x1'1"
- Gas locker located in lazarette under starboard helm seat, for 2 gas bottles with connection to gas system and cut-off valve under stove in the galley
- Wheels 2 leather-covered steering wheels with compasses at each steering position and stainless steel grabrails
- Emergency tiller delivered with the boat, fitting in cockpit floor
- Instrumentation dedicated space for instruments within easy reach of helm positions, room for GPS chartplotter mounted at aft end of cockpit table with easy viewing from each helm
- Engine controls throttle and engine control panel mounted at starboard helm, engine panel includes, RPM gauge, warning lights, ignition

Options

- Full-beam, fold down swim platform with telescopic swim ladder
- Solid teak cockpit table with all the same functions of the standard table, but with wooden leaves
- Cockpit table cover Sunbrella® Taupe (with or without GPS)
- Teak cockpit floor inlay
- Black, composite steering wheels
- Steering wheel covers Sunbrella® Taupe with zips for easy removal
- Cockpit sprayhood wide Sunbrella® Taupe with vinyl windscreen with zip-out middle window for ventilation, retractable
- Cockpit bimini Sunbrella® Taupe with stainless steel bows, retractable with storage cover
- Cockpit cushions Sunbrella® Sling Taupe

DECK HARDWARE

Standard

- Bow pulpit stainless steel
- Stern pulpits stainless steel with buoy bracket and emergency ladder
- Lifelines double level of stainless steel lifelines,
- Toerail
- Cleats 4 x aluminium mooring cleats forward and aft
- Stainless steel handrails on coachroof
- Anchor locker
- Anchor roller single stainless steel fitting
- Fixed windows along coachroof
- Opening ports (2) integrated into fixed windows
- Fixed hull ports (4)
- Opening ports in cockpit (2)
- Opening deck hatches (4)

Options

- Electric windlass 1000W combination rope and 10mm chain
- Mooring kit fenders and docklines
- Bow platform with telescopic, stainless steel access ladder
- Outboard engine bracket mounted on stern pulpit
- Wood rubrail for hull protection
- Anchoring kit Delta anchor 16 kg/35 lbs Delta, 28m (91'10") of 10 mm chain and 40 m (132'2") of 18mm line

LIGHTING

Standard

- Direct and indirect LED lighting in saloon and cabins
- Reading lights in cabins
- Chart light mounted at nav station

ELECTRICAL

Standard

- Electrical panel with 12v breakers, 220v breakers, 12v voltmeter
- 1 12v plug per cabin and at the chart table
- Domestic battery bank capacity, 1 x 80Ah / 12V
- Engine start battery capacity, 1 x 80 A/H 12V
- 12 v alternator output: 125A
- Positive battery switch for engine and domestic bank and general cut-off switch
- Charging distributor and isolator

Options

- Solar panel on coachroof with charging relay
- Upgrade of domestic bank to lithium batteries

PLUMBING

Standard

FRESH WATER

- Pressurised water distributed through-out the boat via semi-rigid hose
- "Heavy-duty" water pump (19 l/5US gal/ mn), accumulator tank for consistent water pressure
- Chromed faucets with shower fittings in heads
- 25 litre / 7 US Gal hot water tank that is connected to engine heat exchanger and 220v system
- Digital water level display

GREY AND BLACK WATER

- Large manual pump marine toilets
- 80 litre / 21 US Gal holding tank with gravity drain and deck fitting

BILGE

- Shower sumps equipped with individual electric pumps with filters and on-off switches
- Manual bilge pump in the cockpit and electric bilge pump with float switch

GAS

- Gas detector

Options

- Extra fresh water tank 130L / 34 US Gal located under aft starboard berth
- Electric Quiet-Flush toilets in place of standard

ENGINE


Standard

- Engine Yanmar 3YM30 Sail-Drive 29 HP / 21KW - Alternator 125A
- Insulation: foam 40 mm / 1 ½", with fire-retardant film
- Fuel/water separator
- Built-in muffler, air ventilation and stainless steel exhaust fitting
- Fixed 3-blade propeller
- GRP rudder(s)


Options

- Bow thruster with 2 extra batteries, tunnel-mounted

LAYOUTS

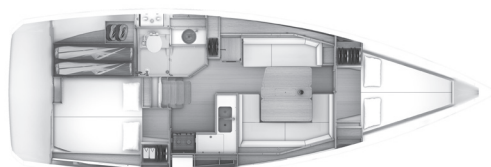

Version A
1 forward cabin, 1 aft cabin, 1 head compartment

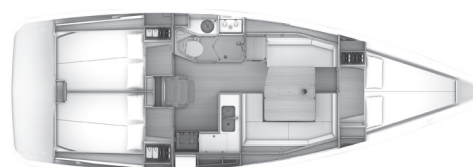

Version B
1 forward cabin, 2 aft cabins, 1 head compartment

INTERIOR

Woodwork

- Alpi Teak interior laminated panels with solid wood trim around galley, companionway and cabinetry, finished in satin UV stabilised varnish
- Fully-upholstered hull sides and ceiling
- Light oak laminate floorboards

Option

- Woodwork in Alpi Light Oak with mouldings in solid Alpi Oak, UV stabilised varnish

Saloon

- Saloon with U-shaped seating area to starboard, cushions and storage under seating area
- Saloon dining table with wood fiddles, removable pedestal legs
- Storage cabinets along hull sides
- Companionway with wood steps and non-slip strips
- Hinged, plexiglass companionway door
- Lounge seating to port with plush cushions and upper storage cabinets
- Bar cabinet at forward end of sofa (version A)

Options

- Luxury salon table with central bar unit, folding top
- Saloon berth conversion kit

Chart table

- Central nav desk with leatherette lining and interior storage
- Full-featured electrical panel
- Wet hanging locker (version A)

Galley

- L-galley to starboard with glass separator between galley counter and seating area
- Double stainless steel sinks with covers, solid countertops, chrome plumbing fittings, storage cabinets and drawers
- Storage compartment for books and magazines built into the galley façade
- Gimballed 2-burner stove with oven with stainless steel protection bar
- Single fridge box with freezer area, wire baskets, 12v refrigeration and integrated compressor

Comfort

- Cushions in high-density foam
- Premium mattresses

Options

- Air conditioning 220v 16 000 BTU installed under saloon seating. Vents in the saloon and cabins (version A only)
- Microwave 220v stainless steel
- Forced air heating 1 unit 5500 BTU Webasto® diesel heater installed in stern, vents in aft cabin, saloon and head compartments

Forward owner's cabin

- Forward cabin with double berth
- Double berth with high-density foam mattress 2.07x1.85m/6'9"x 6'
- Cabinet with shelves and hanging rod
- White vinyl lining on hull with lateral wood shelf

Aft owner's cabin

(version A)

- Double berth with high-density foam mattress 2.02x 1.94m / 6'7" x 6'4"
- Cabinet with shelves and hanging rod
- White vinyl lining on hull with lateral wood shelf
- Large head compartment aft with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump
- Stainless steel hanging bar for wet clothing
- Sail locker with lighting and 2 storage baskets, access from a door in the shower compartment and second access from the cockpit locker

Double aft cabin version

(version B)

- Double berth with high-density foam mattress (2.02x1.58m / 6'7"x 5'2")
- Cabinet with shelves and hanging rod
- White vinyl lining on hull with lateral wood shelf
- Access to tankage
- Large head compartment aft with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump
- Stainless steel hanging bar for wet clothing

HEADROOM

Forward cabin	1,80 m-1,84m / 5'10"-6'	Saloon	1,81-1,92 m / 5'11"-6'3"
Aft cabin(s)	1,90 m / 6'2"	Galley	1,88 m / 6'2"
Companionway	1,93 m / 6'3"		



JEANNEAU

