



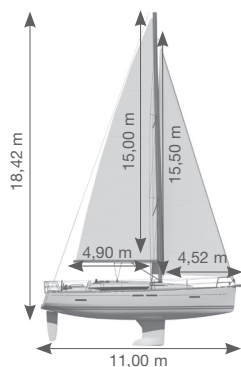

Sun Odyssey 419

SPECIFICATIONS



Overall length	12,34 m / 40'5"
Overall Length with Bowsprit	12,76 m / 41'10"
Hull length	11,99 m / 39'4"
Waterline length	11,00 m / 36'1"
Beam	3,99 m / 13'10"
Displacement light load with deep draft keel	7860 kg / 17328 lbs
Standard keel draft	2,10 m / 6'10"
Standard keel weight	2260 kg / 4982 lbs
Shoal keel draft	1,55 m / 5'1"
Shoal keel weight	2470 kg / 5445 lbs

CE category	A8 / B10 / C12
Fuel capacity	200 L / 53 US gal
Water capacity	330 L / 87 US gal
Fridge capacity	185 L / 49 US gal
Holding tank capacity	80 L / 21 US gal
Architect / Designer	Philippe Briand / Jeanneau Design
Standard mainsail horizontally-cut in High-Quality Dacron	43,50 m² / 468 Sq ft
Standard headsail 106 % horizontally-cut in High-Quality Dacron	32,5 m² / 350 Sq ft

AN EXCEPTIONAL LEVEL OF EQUIPMENT

EXTERIOR

Sailing features

- High aspect ratio rig
- Harken genoa tracks
- Harken winches
- Harken deck hardware
- Aluminium classic mast and boom
- Semi full-batten main and furling genoa with UV protection
- Standing rigging discontinuous stainless steel wire
- Lazy bag and lazy jacks
- Sheets lead back to the helm - German sheeting
- Wide selection of optional sails

Construction

- Hull solid, hand-laid fibreglass, ISO gelcoat surface, protective barrier coat
- Structure 3rd generation inner fibreglass grid, high-load zones cut out and relaminated, drainage system through structure, special emergency repair zone in keel area
- Deck Prisma Process[®] injected deck, ISO gelcoat surface, discontinuous balsa block coring - 30 % weight savings as compared to traditional decks

Cockpit

- Cockpit with dedicated sail handling areas
- Multi-function cockpit table
- Leather-covered steering wheels
- Full-beam, fold down swim platform
- Telescopic swim ladder

Deck

- Flush deck hatches
- Long acrylic deck windows with GRP eyebrow
- Inboard shrouds for easier access forward

INTERIOR

- One-level interior with no door sills
- Leather-wrapped handrails
- Direct and indirect LED lighting
- Large, double berths
- Fully-upholstered hull sides and ceiling
- Numerous choices of interior decor
- Large storage spaces, seaworthy with fiddles

Chart table

- Large nav desk with leatherette lining and interior storage for a portable computer

Galley

- Double stainless steel sinks
- 2-burner stove with oven
- Fridge 185 L / 49 US gal with top access to better maintain the cold air

Woodwork

- Woodwork in Alpi[®] Teak or Oak
- UV stabilised varnish
- Light oak laminate floorboards
- Numerous solid wood mouldings

TECHNICAL

Electrical

- 12 V electrical panel
- Battery Exide Dual Marine
- 125 A alternator and charge distributor / isolator
- Positive and negative battery cut-off switches to better protect battery banks
- LED Navigation Lights

Water systems

- Hot water heater 40 L / 11 US gal
- "Heavy-duty" water pump

Engine

- 40 HP Yanmar Engine Sail Drive
- Fixed 3-blade propeller
- Sound insulation 40 mm / 1 1/2" thick

TRIM LEVELS AND PACKAGES

TRIM LEVEL	PREMIERE	PREFERENCE
Midship cleats	✓	✓
Luxury 2-burner stove with oven and grill in stainless steel	✓	✓
60 A multi-phase battery charger	✓	✓
Electric windlass 1000W combination rope and 10mm chain	✓	✓
2 Additional 115 Ah house batteries	✓	✓
220 V shorepower with plugs at chart table, in the galley and cabins	✓	✓
Shades for hatches and ports and screens for hatches	✓	✓
GRP bowsprit with integrated anchor roller	✓	✓
Plexiglass shower door in head	✓	✓
Hot and cold cockpit shower	✓	✓
Vertical access door to fridge compartment		✓
Indirect lighting in saloon		✓
Fusion R70N with Bluetooth		✓
Speakers in the saloon		✓
Speakers in the cockpit		✓
Lifeline gates		✓
1 Electric coachroof winch 1 x harken 40.2 ST 12 V in place of standard winch to port		✓

NAVIGATION PACK

- Harken 40.2 ST winch on starboard coachroof with additional winch handle
- Spinnaker deck fittings with Spinlock jammers
- Rigid boom vang
- Halyard bags in the cockpit
- Windex 15"

PERFORMANCE PACK

- Flex-o-Fold 3-blade, folding propeller
- Dyneema® low-stretch halyards for main and genoa
- Dyform discontinuous standing rigging

EQUIPMENT

ARCHITECTURE

- Hull chine for improved stability and speed
- Long waterline for better speed while sailing and under power
- L-shaped cast iron keel less exposed to seaweed and lines
- High ballast-to-weight ratio
- Balanced rudder with composite shaft

SAILS

Standard

- Horizontally-cut in High-Quality Dacron Semi full-batten mainsail with 2 auto reefs 43,50 m² / 533 Sq ft
- Furling Genoa 106 % with UV protection 32,5m² / 447 Sq ft
- Lazy bag with offset zipper in Sunbrella® Taupe with integrated lazy jacks

Options

- Performance genoa 140 % with UV protection in triradial cut Mylar/Taffetas 46,1 m² / 589 Sq ft
- Performance genoa 106 % with UV protection in triradial cut Mylar/Taffetas 32,5 m² / 447 Sq ft
- Self-tacking jib with UV protection in triradial cut Mylar/Taffetas laminate 28,2 m² / 380 Sq ft
- Performance, full-batten mainsail in triradial cut Mylar/Taffetas 43,5 m² / 533 Sq ft
- In mast furling horizontally-cut in High-Quality Dacron 34,2 m² / 423 Sq ft
- Code 0 in triradial cut mylar/aramid laminate 70,00 m² / 822 Sq ft, with continuous line furler

SAIL HANDLING

Standard

- Harken genoa tracks with adjustable lead cars (located on the coachroof)
- Mainsheet traveller roof-mounted traveller with ball-bearing cars, control lines lead aft to cockpit
- Spinlock jammers
- Mainsheet and genoa sheet lead back to helm station with Spinlock jammers
- Coachroof winch 1 x Harken 40.2 ST
- Genoa winches 2 x Harken 46.2 ST winches for easy use at the helm stations
- Winch handle 1 x Harken handle with ball-bearing grip

Options

- Genoa tracks for large, overlapping headsail, adjustable Harken lead cars (located on the side decks)
- Self-tacking jib ball bearing track on coachroof
- Asymmetrical spinnaker gear: halyard, 2 sheets, tack line lead forward on deck, blocks
- Harken Electric Genoa winches 2 x 46.2
- Harken "Rewind" electric genoa winches 2 x 46.2 ST winches that can sheet-in and sheet-out electrically
- Genoa winches upgrade to 2 x Harken 50.2 ST

MAST AND RIGGING

Standard

- Classic mast aluminium with double spreaders, deck-stepped
- Backstay double
- Genoa furler with double slot, furling line lead aft to port helm winch
- Running rigging topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets in polyester
- Standing rigging discontinuous 1 x 19 stainless steel wire

Options

- Furling mast aluminium with double spreaders, deck-stepped
- Backstay adjustable via mechanical adjuster

COCKPIT

Standard

- Cockpit table folding table with storage, cup holders, stainless steel handrail, courtesy lighting, 12 V plug
- Teak inlay on cockpit bench seating
- Cockpit lockers 2 lockers under bench seats and 1 lazarette locker under the port helm seat for technical access to steering system
- Liferaft locker located in dedicated compartment 90 x 54 x 34 cm / 2'11" x 1'9" x 1'1"
- Line lockers under helm seats for lines from the primary winches, location for deck fills, cockpit speakers and shorepower inlet
- Gas locker located in lazarette under starboard helm seat, for 2 gas bottles with connection to gas system and cut-off valve under stove in the galley
- Wheels 2 leather-covered steering wheels with compasses at each steering position and stainless steel grabrails
- Emergency tiller delivered with the boat, fitting in cockpit floor
- Instrumentation dedicated space for instruments within easy reach of helm positions, room for GPS chartplotter mounted at aft end of cockpit table with easy viewing from each helm
- Engine controls throttle and engine control panel mounted at starboard helm, engine panel includes, RPM gauge, warning lights, ignition
- Full-beam, fold down swim platform with telescopic swim ladder

Options

- Full-beam, fold down swim platform with telescopic swim ladder
- Solid Teak cockpit table with all the same functions of the standard table, but with wooden leaves
- Cockpit table cover Sunbrella® Taupe (with or without GPS)
- Teak cockpit floor inlay
- Black, composite steering wheels
- Steering wheel covers Sunbrella® Taupe with zips for easy removal
- Cockpit sprayhood wide Sunbrella® Taupe with vinyl windscreen with zip-out middle window for ventilation, retractable
- Cockpit bimini Sunbrella® Taupe with stainless steel bows, retractable with storage cover
- Cockpit cushions Sunbrella® Sling Taupe

DECK HARDWARE

Standard

- Bow pulpit stainless steel
- Stern pulpits stainless steel with buoy bracket and emergency ladder
- Lifelines double level of stainless steel lifelines
- Toerail
- Cleats 4 x aluminium mooring cleats forward and aft
- Stainless steel handrails on coachroof
- Anchor locker
- Anchor roller single stainless steel fitting
- Fixed windows along coachroof
- Opening ports (2) integrated into fixed windows
- Fixed hull ports (8)
- Opening ports in cockpit (2)
- Opening deck hatches (6)

Options

- Windlass control second windlass control mounted in cockpit with chain counter
- Mooring kit fenders and docklines
- Teak decks
- Bow platform with telescopic, stainless steel access ladder
- Outboard engine bracket mounted on stern pulpit
- Wood rubrail for hull protection
- Anchoring kit Delta anchor 20 kg / 44 lbs, 32 m / 104' of 10 mm chain and 45 m / 147' of 18 mm line

LIGHTING

Standard

- Direct and indirect LED lighting in saloon and cabins
- Reading lights in cabins
- Chart light mounted at nav station

ELECTRICAL

Standard

- Electrical panel with 12 V breakers, 220 V breakers, 12 V voltmeter
- 12 V plug per cabin and at the chart table
- Domestic battery bank capacity, 2 x 115 Ah / 12 V
- Engine start battery capacity, 1 x 120 Ah / 12 V
- 12 V alternator output: 125 A
- Positive battery switch for engine and domestic bank and general cut-off switch
- Charging distributor and isolator

Options

- Upgrade of domestic bank lithium batteries
- Solar panel on coachroof with charging relay

PLUMBING

Standard

FRESH WATER

- Pressurised water distributed through-out the boat via semi-rigid hose
- "Heavy-duty" water pump 19 L / 5 US gal / mn, accumulator tank for consistent water pressure
- Chromed faucets with shower fittings in heads
- 40 L / 11 US gal hot water tank that is connected to engine heat exchanger and 220 V system
- Digital water level display

GREY AND BLACK WATER

- Large manual pump marine toilets
- 80 L / 21 US gal holding tank with gravity drain and deck fitting

BILGE

- Shower sumps equipped with individual electric pumps with filters and on-off switches
- Manual bilge pump in the cockpit and electric bilge pump with float switch

GAS

- Gas detector

Options

- Electric Quiet-Flush toilets in place of standard
- Extra fresh water tank 200 L / 53 US gal located under aft starboard berth

ENGINE


Standard

- Engine Yanmar 3JH5CE Sail Drive - 40 HP / 28,7 kW - Alternator 125 A
- Insulation: foam 40 mm / 1 ½", with fire-retardant film
- Fuel / water separator
- Built-in muffler, air ventilation and stainless steel exhaust fitting
- Fixed 3-blade propeller
- GRP rudder


Option

- Engine Yanmar 4JH45CR Sail Drive Common Rail - 45 HP / 33 kW
- Bow thruster with 2 extra batteries, tunnel moulded into the hull


LAYOUTS




Version A
1 forward cabin, 1 aft cabin,
1 head



Version B
1 forward cabin, 1 aft cabin,
2 heads



Version C
1 forward cabin, 2 aft cabins,
1 head

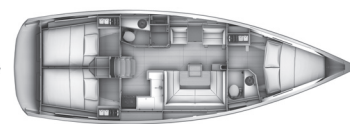

Version D
1 forward cabin, 2 aft cabins,
2 heads

INTERIOR

Woodwork

- Alpi® Teak interior laminated panels with solid wood trim around galley, companionway and cabinetry, finished in satin UV stabilised varnish
- Fully-upholstered hull sides and ceiling
- Light Oak laminate floorboards

Options

- Dark Oak laminate floorboards
- Woodwork in Alpi® Light Oak with mouldings in solid Alpi® Oak, UV stabilised varnish

Saloon

- Saloon with U-shaped seating area to starboard, cushions and storage under seating area
- Saloon dining table with wood fiddles, removable pedestal legs
- Storage cabinets along hull sides
- Companionway with wood steps and non-slip strips
- Hinged, plexiglass companionway door
- Lounge seating to port with plush cushions and upper storage cabinets

Options

- Luxury salon table with central bar unit, folding top, and sliding tracks to transform into double berth
- Saloon berth conversion kit

Chart table

- Central nav desk with leatherette lining and interior storage
- Full-featured electrical panel

Galley

- L-galley to starboard with glass separator between galley counter and seating area
- Double stainless steel sinks with covers, solid countertops, chrome plumbing fittings, storage cabinets and drawers
- Storage compartment for books and magazines built into the galley façade
- Gimballed 2-burner stove with oven with stainless steel protection bar
- Single fridge box with freezer area, wire baskets, 12 V refrigeration and integrated compressor

Comfort

- Cushions in high-density foam
- Premium mattresses

Options

- TV antenna for masthead with amplifier
- TV LED 22" mounted on mast bulkhead with Fusion DVD player
- Air Conditioning 220 V 24000 BTU 2 units installed under saloon seating and in stern, vents in saloon, head compartments and forward and aft cabins control panel and thermostat
- Microwave 220 V stainless steel
- Forced air heating 1 unit 5500 BTU Webasto® diesel heater installed in stern, vents in aft cabin, saloon and head compartments

Forward owner's cabin

(all versions)

- Forward cabin with double cabin
- Double berth with High Density foam 2,10 x 2,00 m / 6'10" x 6'6"
- Cabinet with shelves and hanging rod (2 for versions A & C)
- White vinyl lining on hull with lateral wood shelf
- Private forward head compartment with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump (only for versions B & D)

Option

- Desk / vanity with leatherette lining and fold-up mirror, reading light and chair with backrest (only for versions A & C)

Aft owner's cabin

(versions A & B)

- Double berth with High Density foam mattress 2,00 x 1,78 m / 6'6" x 5'10"
- Cabinet with shelves and hanging rod
- White vinyl lining on hull with lateral wood shelf
- Large head compartment aft with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump
- Stainless steel hanging bar for wet clothing
- Sail locker with lighting and 2 storage baskets, access from a door in the shower compartment and second access from the cockpit locker

Double aft cabin version

(versions C & D)

- Double berth with High Density foam mattress 2,00 x 1,57 m / 6'6" x 5'1"
- Cabinet with shelves and hanging rod
- White vinyl lining on hull with lateral wood shelf
- Access to tankage
- Large head compartment aft with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump
- Stainless steel hanging bar for wet clothing

HEADROOM

Forward cabin	1,84 m / 6'0"	Saloon	1,92 m / 6'3"
Aft cabin(s)	1,95 m / 6'4"	Galley	1,91 m / 6'3"
Companionway	1,94 m / 6'4"		





JEANNEAU





Sun Odyssey 419

SPECIFICATIONS

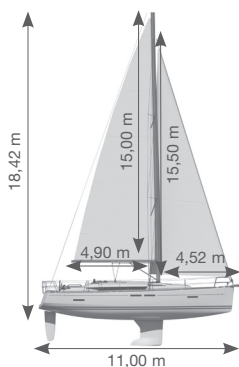

Overall length	12,34 m / 40'5"
Overall Length with Bowsprit	12,76 m / 41'10"
Hull length	11,99 m / 39'4"
Waterline length	11,00 m / 36'1"
Beam	3,99 m / 13'10"
Displacement light load with deep draft keel	7860 kg / 17328 lbs
Standard keel draft	2,10 m / 6'10"
Standard keel weight	2260 kg / 4982 lbs
Shoal keel draft	1,55 m / 5'1"
Shoal keel weight	2470 kg / 5445 lbs

CE category	A8 / B10 / C12
Fuel capacity	200 L / 53 US gal
Water capacity	330 L / 87 US gal
Fridge capacity	185 L / 49 US gal
Holding tank capacity	80 L / 21 US gal
Architect / Designer	Philippe Briand / Jeanneau Design
Standard mainsail horizontally-cut in High-Quality Dacron	43,50 m² / 468 Sq ft
Standard headsail 106 % horizontally-cut in High-Quality Dacron	32,5 m² / 350 Sq ft

AN EXCEPTIONAL LEVEL OF EQUIPMENT

EXTERIOR

Sailing features

- High aspect ratio rig
- Harken genoa tracks
- Harken winches
- Harken deck hardware
- Aluminium classic mast and boom
- Semi full-batten main and furling genoa with UV protection
- Standing rigging discontinuous stainless steel wire
- Lazy bag and lazy jacks
- Sheets lead back to the helm – German sheeting
- Wide selection of optional sails

Construction

- Hull solid, hand-laid fibreglass, ISO gelcoat surface, protective barrier coat
- Structure 3rd generation inner fibreglass grid, high-load zones cut out and relaminated, drainage system through structure, special emergency repair zone in keel area
- Deck Prisma Process[®] injected deck, ISO gelcoat surface, discontinuous balsa block coring – 30 % weight savings as compared to traditional decks

Cockpit

- Cockpit with dedicated sail handling areas
- Multi-function cockpit table
- Leather-covered steering wheels
- Full-beam, fold down swim platform
- Telescopic swim ladder

Deck

- Flush deck hatches
- Long acrylic deck windows with GRP eyebrow
- Inboard shrouds for easier access forward

INTERIOR

- One-level interior with no door sills
- Leather-wrapped handrails
- Direct and indirect LED lighting
- Large, double berths
- Fully-upholstered hull sides and ceiling
- Numerous choices of interior decor
- Large storage spaces, seaworthy with fiddles

Chart table

- Large nav desk with leatherette lining and interior storage for a portable computer

Galley

- Double stainless steel sinks
- 2-burner stove with oven
- Fridge 185 L / 49 US gal with top access to better maintain the cold air

Woodwork

- Woodwork in Alpi[®] Teak or Oak
- UV stabilised varnish
- Light Oak laminate floorboards
- Numerous solid wood mouldings

TECHNICAL

Electrical

- 12 V electrical panel
- Battery Exide Dual Marine
- 125 A alternator and charge distributor/isolator
- Positive and negative battery cut-off switches to better protect battery banks
- LED Navigation Lights

Water systems

- Hot water heater 40 L / 11 US gal
- "Heavy-duty" water pump

Engine

- 40 HP Yanmar Engine Sail Drive
- Fixed 3-blade propeller
- Sound insulation 40 mm / 1 1/2" thick

TRIM LEVELS AND PACKAGES

TRIM LEVEL	PREMIERE	PREFERENCE
Midship cleats	✓	✓
Luxury 2-burner stove with oven and grill in stainless steel	✓	✓
60 A multi-phase battery charger	✓	✓
Electric windlass 1000 W combination rope and 10 mm chain	✓	✓
2 Additional 115 Ah house batteries	✓	✓
220 V shorepower with plugs at chart table, in the galley and cabins	✓	✓
Shades for hatches and ports and screens for hatches	✓	✓
GRP bowsprit with integrated anchor roller	✓	✓
Plexiglass shower door in head	✓	✓
Hot and cold cockpit shower	✓	✓
Vertical access door to fridge compartment		✓
Indirect lighting in saloon		✓
Fusion R70N with Bluetooth		✓
Speakers in the saloon		✓
Speakers in the cockpit		✓
Lifeline gates		✓
1 Electric coachroof winch 1 x Harken 40.2 ST 12 V in place of standard winch to port		✓

NAVIGATION PACK

- Harken 40.2 ST winch on starboard coachroof with additional winch handle
- Spinnaker deck fittings with Spinlock jammers
- Rigid boom vang
- Halyard bags in the cockpit
- Windex 15"

PERFORMANCE PACK

- Flex-o-Fold 3-blade, folding propeller
- Dyneema® low-stretch halyards for main and genoa
- Dyform discontinuous standing rigging

EQUIPMENT

ARCHITECTURE

- Hull chine for improved stability and speed
- Long waterline for better speed while sailing and under power
- L-shaped cast iron keel less exposed to seaweed and lines
- High ballast-to-weight ratio
- Balanced rudder with composite shaft

SAILS

Standard

- Horizontally-cut in High-Quality Dacron Semi full-batten mainsail with 2 auto reefs 43,50 m² / 533 Sq ft
- Furling Genoa 106 % with UV protection 32,5 m² / 447 Sq ft
- Lazy bag with offset zipper in Sunbrella® Taupe with integrated lazy jacks

Options

- Performance genoa 140 % with UV protection in triradial cut Mylar/Taffetas 46,1 m² / 589 Sq ft
- Performance genoa 106 % with UV protection in triradial cut Mylar/Taffetas 32,5 m² / 447 Sq ft
- Self-tacking jib with UV protection in triradial cut Mylar/Taffetas laminate 28,2 m² / 380 Sq ft
- Performance, full-batten mainsail in triradial cut Mylar/Taffetas 43,5 m² / 533 Sq ft
- In mast furling horizontally-cut in High-Quality Dacron 34,2m² / 423 Sq ft
- Code 0 in triradial cut Mylar/Aramid laminate 70 m² / 822 Sq ft, with continuous line furler

SAIL HANDLING

Standard

- Harken genoa tracks with adjustable lead cars (located on the coachroof)
- Mainsheet traveller roof-mounted traveller with ball-bearing cars, control lines lead aft to cockpit
- Spinlock jammers
- Mainsheet and genoa sheet lead back to helm station with Spinlock jammers
- Coachroof winch 1 x Harken 40.2 ST
- Genoa winches 2 x Harken 46.2 ST winches for easy use at the helm stations
- Winch handle 1 x Harken handle with ball-bearing grip

Options

- Genoa tracks for large, overlapping headsail, adjustable Harken lead cars (located on the side decks)
- Self-tacking jib ball bearing track on coachroof
- Asymmetrical spinnaker gear: halyard, 2 sheets, tack line lead forward on deck, blocks
- Harken Electric Genoa winches 2 x 46.2
- Harken "Rewind" electric genoa winches 2 x 46.2 ST winches that can sheet-in and sheet-out electrically
- Genoa winches Upgrade to 2 x Harken 50.2 ST

MAST AND RIGGING

Standard

- Classic mast aluminium with double spreaders, deck-stepped
- Backstay double
- Genoa furler with double slot, furling line lead aft to port helm winch
- Running rigging topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets in polyester
- Standing rigging discontinuous 1 x 19 stainless steel wire

Options

- Furling mast aluminium with double spreaders, deck-stepped
- Backstay adjustable via mechanical adjuster

COCKPIT

Standard

- Cockpit table folding table with storage, cup holders, stainless steel handrail, courtesy lighting, 12 V plug
- Teak inlay on cockpit bench seating
- Cockpit lockers 2 lockers under bench seats and 1 lazette locker under the port helm seat for technical access to steering system
- Liferaft locker located in dedicated compartment 90 x 54 x 34 cm / 2'11" x 1'9" x 1'1"
- Line lockers under helm seats for lines from the primary winches, location for deck fills, cockpit speakers and shorepower inlet
- Gas locker located in lazette under starboard helm seat, for 2 gas bottles with connection to gas system and cut-off valve under stove in the galley
- Wheels 2 leather-covered steering wheels with compasses at each steering position and stainless steel grabrails
- Emergency tiller delivered with the boat, fitting in cockpit floor
- Instrumentation dedicated space for instruments within easy reach of helm positions, room for GPS chartplotter mounted at aft end of cockpit table with easy viewing from each helm
- Engine controls throttle and engine control panel mounted at starboard helm, engine panel includes, RPM gauge, warning lights, ignition
- Full-beam, fold down swim platform with telescopic swim ladder

Options

- Full-beam, fold down swim platform with telescopic swim ladder
- Solid teak cockpit table with all the same functions of the standard table, but with wooden leaves
- Cockpit table cover Sunbrella® Taupe (with or without GPS)
- Teak cockpit floor inlay
- Black, composite steering wheels
- Steering wheel covers Sunbrella® Taupe with zips for easy removal
- Cockpit sprayhood wide Sunbrella® Taupe with vinyl windscreen with zip-out middle window for ventilation, retractable
- Cockpit bimini Sunbrella® Taupe with stainless steel bows, retractable with storage cover
- Cockpit cushions Sunbrella® Sling Taupe

DECK HARDWARE

Standard

- Bow pulpit stainless steel
- Stern pulpits stainless steel with buoy bracket and emergency ladder
- Lifelines double level of stainless steel lifelines,
- Toerail
- Cleats 4 x aluminium mooring cleats forward and aft
- Stainless steel handrails on coachroof
- Anchor locker
- Anchor roller single stainless steel fitting
- Fixed windows along coachroof (6)
- Opening ports (2) integrated into fixed windows
- Fixed hull ports (8)
- Opening ports in cockpit (2)
- Opening deck hatches (6)

Options

- Windlass control second windlass control mounted in cockpit with chain counter
- Mooring kit fenders and docklines
- Teak decks
- Bow platform with telescopic, stainless steel access ladder
- Outboard engine bracket mounted on stern pulpit
- Wood rubrail for hull protection
- Anchoring kit Delta anchor 20 kg / 44 lbs, 32 m / 104' of 10 mm chain and 45 m / 147' of 18 mm line

LIGHTING

Standard

- Direct and indirect LED lighting in saloon and cabins
- Reading lights in cabins
- Chart light mounted at nav station

ELECTRICAL

Standard

- Electrical panel with 12 V breakers, 220 V breakers, 12 V voltmeter
- 12 V plug per cabin and at the chart table
- Domestic battery bank capacity, 2 x 115 Ah 12 V
- Engine start battery capacity, 1 x 120 Ah / 12 V
- 12 V alternator output: 125 A
- Positive battery switch for engine and domestic bank and general cut-off switch
- Charging distributor and isolator

Options

- Upgrade of domestic bank lithium batteries
- Solar panel on coachroof with charging relay

PLUMBING

Standard

FRESH WATER

- Pressurised water distributed through-out the boat via semi-rigid hose
- "Heavy-duty" water pump 19 L / 5 US gal / mn, accumulator tank for consistent water pressure
- Chromed faucets with shower fittings in heads
- 40 L / 11 US gal hot water tank that is connected to engine heat exchanger and 220 V system
- Digital water level display

GREY AND BLACK WATER

- Large manual pump marine toilets
- 80 L / 21 US gal holding tank with gravity drain and deck fitting

BILGE

- Shower sumps equipped with individual electric pumps with filters and on-off switches
- Manual bilge pump in the cockpit and electric bilge pump with float switch

GAS

- Gas detector

Options

- Electric Quiet-Flush toilets in place of standard
- Extra fresh water tank 200 L / 53 US gal located under aft starboard berth

ENGINE


Standard

- Engine Yanmar 3JH5CE Sail Drive - 40 HP / 29,4 kW - Alternator 125 A
- Insulation: foam 40 mm / 1 ½", with fire-retardant film
- Fuel / water separator
- Built-in muffler, air ventilation and stainless steel exhaust fitting
- Fixed 3-blade propeller
- GRP rudder


Option

- Engine Yanmar 4JH45CR Sail Drive Common Rail 45 HP / 33 kW
- Bow thruster with 2 extra batteries, tunnel moulded into the hull


LAYOUTS




Version A
1 forward cabin, 1 aft cabin,
1 head compartment



Version B
1 forward cabin, 1 aft cabin,
2 head compartments



Version C
1 forward cabin, 2 aft cabins,
1 head compartment

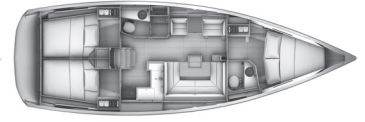

Version D
1 forward cabin, 2 aft cabins,
2 head compartments

INTERIOR

Woodwork

- Alpi® Teak interior laminated panels with solid wood trim around galley, companionway and cabinetry, finished in satin UV stabilised varnish
- Fully-upholstered hull sides and ceiling
- Light Oak laminate floorboards

Options

- Dark Oak laminate floorboards
- Woodwork in Alpi® Light Oak with mouldings in solid Alpi® Oak, UV stabilised varnish

Saloon

- Saloon with U-shaped seating area to starboard, cushions and storage under seating area
- Saloon dining table with wood fiddles, removable pedestal legs
- Storage cabinets along hull sides
- Companionway with wood steps and non-slip strips
- Hinged, plexiglass companionway door
- Lounge seating to port with plush cushions and upper storage cabinets

Options

- Luxury salon table with central bar unit, folding top, and sliding tracks to transform into double berth
- Saloon berth conversion kit

Chart table

- Central nav desk with leatherette lining and interior storage
- Full-featured electrical panel

Galley

- L-galley to starboard with glass separator between galley counter and seating area
- Double stainless steel sinks with covers, solid countertops, chrome plumbing fittings, storage cabinets and drawers
- Storage compartment for books and magazines built into the galley façade
- Gimballed 2-burner stove with oven with stainless steel protection bar
- Single fridge box with freezer area, wire baskets, 12 V refrigeration and integrated compressor

Comfort

- Cushions in high-density foam
- Premium mattresses

Options

- TV antenna for masthead with amplifier
- TV LED 22" mounted on mast bulkhead with FUSION DVD player
- Air Conditioning 220 V 24000 BTU 2 units installed under saloon seating and in stern, vents in saloon, head compartments and forward and aft cabins control panel and thermostat
- Microwave 220 V stainless steel
- Forced air heating 1 unit 5500 BTU Webasto® diesel heater installed in stern, vents in aft cabin, saloon and head compartments

Forward owner's cabin

(all versions)

- Forward cabin with double cabin
- Double berth with High Density foam 2,10 x 2,00 m / 6'10" x 6'6"
- Cabinet with shelves and hanging rod (2 for versions A & C)
- White vinyl lining on hull with lateral wood shelf
- Private forward head compartment with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump (only for versions B & D)

Option

- Desk / vanity with leatherette lining and fold-up mirror, reading light and chair with backrest (only for versions A & C)

Aft owner's cabin

(versions A & B)

- Double berth with High Density foam mattress 2,00 x 1,78 m / 6'6" x 5'10"
- Cabinet with shelves and hanging rod
- White vinyl lining on hull with lateral wood shelf
- Large head compartment aft with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump
- Stainless steel hanging bar for wet clothing
- Sail locker with lighting and 2 storage baskets, access from a door in the shower compartment and second access from the cockpit locker

Double aft cabin version

(versions C & D)

- Double berth with High Density foam mattress 2,00 x 1,57 m / 6'6" x 5'1"
- Cabinet with shelves and hanging rod
- White vinyl lining on hull with lateral wood shelf
- Access to tankage
- Large head compartment aft with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump
- Stainless steel hanging bar for wet clothing

HEADROOM

Forward cabin	1,84 m / 6'0"	Saloon	1,92 m / 6'3"
Aft cabin(s)	1,95 m / 6'4"	Galley	1,91 m / 6'3"
Companionway	1,94 m / 6'4"		



JEANNEAU

